

# Literature Review–Web Conferencing Systems

**Chandraket Raj<sup>1</sup>, Hrithik meghani<sup>2</sup>, Yadav Premprakash L<sup>3</sup>**

Dr. D.Y Patil School Of Engineering Academy<sup>1-3</sup>

**Abstract:** Web conferencing or online meeting tools allow remote meeting and collaborative work in any company or institute. Poor Internet service however makes most Web conferencing solutions unreliable for some region and developing countries in general. This paper reviews the literature on improving the user experience with low bandwidth and unstable Internet conditions for Website conferencing .we have special concentration on audio/video stream optimization, which is the most affected feature of any conferencing system. The ongoing research in this area can be grouped into multiple domains. First thing is research on rate adaptation schemes that aims to provide the Stream high-quality content to many recipients while making the most of available bandwidth. Second thing is research on compression which attempts to reduce the bandwidth requirement with acceptable content quality. The last research studies how to weaken the influence of transmission errors and problems over the content provided.

## INTRODUCTION

Web conferencing systems are Internet based tool offering a virtual environment for remote meeting and collaborative work among geographically different locations .virtual conferencing can avoid travel expenses and time for face-to-face meetings . This explains the worldwide spreading of web based or app based conferencing tools.

India or some African countries ,and other developing countries in general, often rely on low bandwidth and unstable Internet connections. This badly affects the service quality offered by Web conferencing solutions, often developed with the assumption of a good Internet connection. That is why most current conferencing tools cannot reliably be used in the African context

The most affected feature of online conferencing systems is the real-time audio/video communication, which requires a high speed and steady Internet link. This paper is then a review of the literature on improving the quality of user experience for web based conferencing using an extreme Internet service. This review focuses on multimedia streaming with low bandwidth and unstable networking conditions.

It is a general presentation of Web meeting software. In section, the influence of poor Internet transmission on user experience is discussed. Section 4reviews the literature. Finally, section 5 compares and discusses the current state of the art and how the findings can positively affect the Web conferencing user experience.

## ONLINECONFERENCINGSYSTEM

On-line Conferencing Systems, sometimes referred to as Electronic Meeting Systems (EMS),are Internet-based services offering a virtual environment for real-time remote meetings between geographically dispersed participants. EMS are part of the broader field of Collaborative Internet Systems that encompasses the use of computers and Web technologies to support coordination and cooperation of two or more people attempting to perform a task or solve a problem together.

EMS environment offers tools, methods and features to support remote meetings. Some of the common features include slides

How presentation sharing, audio/video communication, shared whiteboard for annotation and text chatting.Fig.1illustrates a common EMS user interface

EMS and Collaborative tools in general perform an important role into organizations. They can offer a functional meeting platform where regular face-to-face meeting is infeasible(due to travel constraints, for example)or unaffordable.

Current EMS solutions range from sophisticated executive meeting suites for immersive experience to simple computer to computer solutions. A server hosting the meeting is often involved; it can be hosted on the Internet or in to a local network(for local meeting sessions) . The client can be a regular computer (or a mobile handset) with audio and video capture devices for audio/video conferencing. The communication relies on Web technologies and Internet protocols.



Fig no .1 -Example of user interface for EMS

Table 1 lists some of the current Web meeting tools.

Table1-ExistingWeb-conferencingsoftware

Software	License	capacity
Adobe Acrobat Connect	Commercial	500 users
Buddy Meeting	GPL+ Free	10 users
Cisco Unified Meeting Place	Commercial	500 users
Dim dim	Commercial	Depend on subscription.
Zoho	Commercial	Depend upon subscription

**Keyword :** web conferencing , Transmission , Error Tolrence , stream buffering etc.

Software : javascript , html , css , Node.js , peer.js , socket.io ,etc.

Hardware : win or linuxos, nic card for internet connection, webcam , mic, etc.

Existing System or software : cisco webex , zoom , MS teams , etc.

### 1. EFFECTS OF POOR INTERNET TRANSMISSION ON THE QUALITY OF USER EXPERIENCE

When using Electronic Meeting System, users not only interact with the computing environment, but with other peers through various communication channels(text, audio, video, etc.). The table below summarizes how some important Quality of Service (QoS) degradation scan affect the user experience quality.

Table2- QoS degradation effects on user experience

QoS degradation	Consequence on user experience
Long and random delay sand packet loss	Directly affect fluency of multimedia stream, leading To poor user concentration
Frequent interruptions	Badly alter the sense of “presence”, can be very irritating for the user
Low bandwidth	Delivery of poor quality content which cuts off the user enjoyment and immersive experience



As per today, it is impossible to ensure a perfect QoS over the Internet. So, lots of research is being conducted to enhance the user experience under poor QoS. The next section discusses some of the current state of the art in this challenging research area.

## 2. HOW TO IMPROVE THE USER EXPERIENCE UNDER POOR INTERNET CONNECTION

Several research avenues are exploited to enhance the user experience under limited Internet transmission, which can be summarized in the following three main domains:

**Transmission rate adaptation** : research in this area studies how to efficiently use the available bandwidth to broadcast a multimedia stream to several recipients.

**Error tolerance**: the aim here is to develop correction schemes to make transmission errors less noticeable by the user.

**Compression**: a good compression scheme reduces the network load while keeping a reasonable content quality. Findings in this are a help to reduce the effect of low bandwidth on the user experience.

### **Transmission rate adaptation**

Research in this domain aims to optimally adapt the multimedia stream rate to user bandwidth capacity in order to provide the best QoS possible. The main challenge is to accommodate heterogeneous environments where several users have different bandwidths.

### **Source based rate adaptation**

This approach is the simplest solution to the problem. A uniform representation of the signal is sent to all interested receivers using IP multicast. So, the sender or source broadcasts at a fixed rate without regard to changing network conditions. The source-based rate adaptation is very simple to implement and supposes that receivers have almost the same bandwidth, which do not change a lot over the time. In realistic condition though, the bandwidth is not stable and receivers have different amount of bandwidth. So, the current method performs poorly in heterogeneous environments since low capacity regions of the network suffer congestion while high capacity regions are underutilized. Receiver based rate adaptation

The Internet's heterogeneity makes multi-point communication design a difficult problem. The receiver based rate adaptation struggles to solve this problem. The objective is to broadcast a live signal from any particular sender to an arbitrarily large set of receivers along paths with potentially high variability in bandwidth . To achieve this, the transmission rate is adjusted to match the available capacity in the networks.

The general principle is to broadcast several flows and each receiver, depending on its actual available bandwidth, will subscribe too or more streams. Hence, it is up to the receiver to adapt the flow rate in this approach.

There are several implementations for the receiver based rate adaptation, which can be grouped into two main models: simulcast and multilayer.


### **The simulcast model**

In this model, the sender transmits multiples copies of the same signal simultaneously at different rates (result in different qualities). Depending on its available bandwidth, the receiver subscribes to only one flow, which is the optimal quality for the actual capacity. Should the network condition change, the receiver can adapt by subscribing to another "flow channel" to avoid either congestion or under utilization of the bandwidth. This approach requires a good bandwidth at the sender side to supply parallel streams.

### **The multilayer model**

The multilayer model encodes the stream into a number of layers that can be incrementally combined to provide progressive refinement.

The receivers can then connect to more than one layer at the same time. Each upper layer to which the user connects provides further content refinement. Fig. 2 illustrates a situation where three receivers with different amounts of bandwidth (R1:512Kbs/s,R2:256 Kbs/s and R3: 128 Kbs/s) connect to a sender with 512 Kbs/s bandwidth.

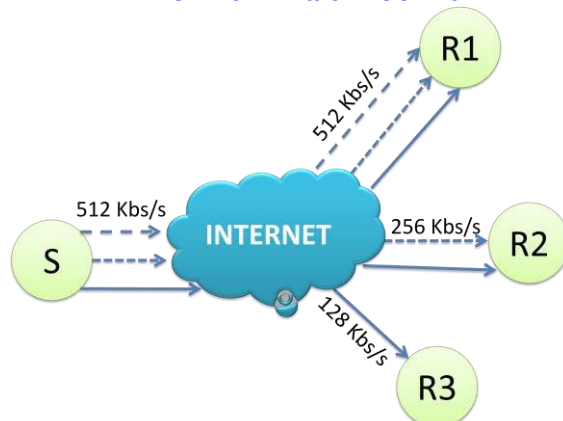

**Fig.2–Rate adaptation based on multilayer model**

In the implementation of this model, the receiver connects initially to the first or base layer. If reception is good (no congestion, smaller rate, etc.), it adds these on upper layer, which adds a certain refinement to the stream and the reception quality is analyzed again. This process is repeated to eventually reach the best tradeoff between bandwidth and quality. If on the opposite, the bandwidth decreases while receiving, the user can simply successively drop the upper layers to adapt the stream to the actual capacity.

Another important advantage of this model is the ability to associate a priority with each layer. The basic layer can get the highest priority and upper layers lower priorities. So when the bandwidth decreases, the routers can drop the upper layer packets which carry refinement information first. This technique leads to a graceful degradation of the stream over low and unstable bandwidth, substantially improving the quality of the user experience.

### Error tolerance

The Internet often suffers from packet loss and random delay (jitter), degrading the user's perceived quality of multimedia stream (audio and video). The following section discusses some approaches enhancing the quality of user experience under usual Internet transmission problems.

### Stream buffering

In this approach, transmitted frames are buffered in memory by the receiver, allowing each frame to be played out with a constant latency, achieving a steadier stream. The added latency can badly alter interactive communication. So the buffer size should be chosen to provide the best perceptual quality, taking into account the tradeoff between decreased jitter and increased latency.

### Error tolerance and correction

This approach privileges real time traffic by minimizing the delay as much as possible. Some error correction methods insert redundant information into the packet for later recovery. But this approach augments the bandwidth usage. A second approach is to retransmit erroneous packets. Under high error rate conditions, this approach worsens the jitter problem and generates a network overhead. A third approach is to generate small packets, so when an error or loss occurs, the packet is merely ignored (replacement with a silent packet for audio stream, for example). Under low error rates, the small ignored packets will not be noticed by the user. But above a certain error threshold (depending on the nature of the stream), this approach is almost useless.

### Compression schemes

In the electronic meeting context, the video stream consumes most of the bandwidth (around 10 times more than the audio). The compression aims to reduce the bandwidth needed when keeping an acceptable quality for the user experience.

### The Discrete Cosine Transform (DCT)

DCT is used in most of video conferencing systems. A modern DCT compressor requires roughly 100 Kbps for a 320\*240\*15 fps video of a person's upper body. Below this rate, the video image motion may appear jerky (emergence of blocking artifacts).

To cope with very low bandwidth, two alternative approaches have been developed. In the first approach, only the outlines of image screen coded. Experimentation has shown that people can actually



recognize the identity and facial expression of a person by the outlines official features. An implementation of this idea can delivers usable video at less than 10 Kbps. On the second approach, some key facial features are encoded in order to animate a 3D model of the person's head. The Moving Picture Experts Group (MPEG) is standardizing this approach and a good implementation can deliver a usable video at less than 1Kbps!.

### Frame rate minimization

The bandwidth requirement can be lowered by decreasing the video frame rate(which is the number of images displayed per second).Experiment demonstrated that a frame rate as low as one update every five minutes is enough to provide environment awareness. But studies on user behavior suggest that 5frame per second (fps) is the acceptable lower bound for a direct human to human interaction. An enhancement of this approach is to use a dynamic frame rate. . Otherwise keep a very low frame rate.

## 3. COMPARISON AND DISCUSSION

Lots of current research results (in multiple domains) can contribute to improve the quality of user experience when using poor Internet connection for Electronic Meeting Systems. This section compares and discusses some of main findings and their possible application to the Web meeting context.

Research on rate adaptation aims to provide the best streaming broad cast quality adapted to the available bandwidth. The source based approach poorly uses the available bandwidth. On the other hand, the multilayer model approach offers the best rate adaptation since it allows the definition of different QoS on layers (leading to graceful signal degradation).

Error correction techniques based on retransmission and redundancy are simply not applicable in Web meeting contexts, as they increase the network overhead. The buffering approach is a better solution.

Since meeting exchanges are not as interactive as a phone call, for example, the small delay introduced by the buffering will almost not be perceived by other participants, as long as the delivered stream is smooth.

There is good progress on video compression too, but the bandwidth required (100Kbp) to keep an acceptable quality can still be too much (for African contexts especially).So, it's better to combine a compression scheme with frame rate minimization to deliver a usable video stream over very low bandwidth conditions.

## CONCLUSION

This paper is a review of the literature on improving the Web conferencing user experience under low bandwidth and unstable Internet connection. A good understanding of how specific degradation of Internet Quality of Service (QoS)can alter the Quality of Experience (QOE) helps to develop mechanisms to deliver acceptable content on top of poor networking conditions.

Interestingly, lots of reviewed approaches can complementarily be used to improve the service quality of Web-conferencing systems. For example, a good compression scheme can be combined with dynamic framing methods to provide an acceptable video stream under very low bandwidth conditions. The same way, buffering and error tolerance algorithms can be mixed to supply smooth audio streaming on unstable Internet links (presenting interruptions, random delay sand packet loss).

## REFERENCES

- Aguilar, L., Garcia-Luna-Aceves, J. J., Moran, D., Craighill, E., & Brungardt, R. (1986). An architecture for a multimedia tele conferencing system. *ACM SIGCOMM Computer Communication Review*, 16(3), 126-136. doi:10.1145/1013812.18188.
- Amir, E., McCanne, S., & Katz, R. (1997). Receiver-driven bandwidth adaptation for light-weight sessions. *Proceedings of the fifth ACM international conference on Multimedia -MULTIMEDIA '97*, 415-426. New York, Ne York, USA: ACM Press. doi:10.1145/266180.266395.
- Bafoutsou, G. (2002). Review and functional classification of collaborative systems. *International Journal of Information Management*, 22(4), 281-305. doi:10.1016/S0268-4012(02)00013-0.
- Chen, M. (2002). Achieving effective floor control with a low-bandwidth gesture-sensitive video conferencing system. *Proceedings of the tenth ACM international conference on Multimedia - MULTIMEDIA '02*, 476. New York, New York, USA: ACM Press. doi:10.1145/641108.641109.
- Claypool, M., & Tanner, J. (1999). The effects of jitter on the peceptual quality of video. *Proceedings of the seventh ACM international conference on Multimedia(Part2)-MULTIMEDIA '99*, 115-118. New York, New York, USA: ACM Press. doi:10.1145/319878.319909.
- Deering, S. E., & Cheriton, D. R. (1990). Multi cast routing in datagram internet works and extended LANs. *ACM*





Transactions on Computer Systems,8(2),85-110. doi:10.1145/78952.78953.

Egido, C. (1998). Video conferencing as a technology to support group work: a review of its failures. Computer Supported Cooperative Work (CSCW)(pp. 13 - 24). Morristown, USA: ACM New York,NY,USA©1988.

Gill, P., Shi, L., Mahanti, A., Li, Z., & Eager, D. L.(2008). Scalable on-demand media streaming for heterogeneous clients. ACM Transactions on Multimedia Computing, Communications, and Applications, 5(1), 1-24. doi:10.1145/1404880.1404888.

Gurhan,G.F.,Fox,G., Gunduz,G.,&Uyar,A. (n.d.).Audio Video Conferencing. Retrieved April27, 2011, fromhttp://citeseerx.ist.psu.edu/viewdoc/summary?doi=10.1.1.24.3422.Hargreaves,D. M. G., &McCown, B. R. L.(2008).

Low-cost, low-bandwidth online meetings between farmers and scientists. Proceedings ofthe20thAustralasianConferenceonComputer-Human Interaction Designing for Habitus and Habitat-OZCHI'08,271.NewYork,NewYork,USA: ACM Press. doi:10.1145/1517744.1517776. McCanne, S.,Jacobson,V.,&Vetterli,M. (1996). Receiver-driven layered multicast. ACMSIGCOMM Computer Communication Review,26(4),117-130.doi: 10.1145/248157.248168.

Ramesh, J., Pilho, K., & Zhao, L. (2003). Experiential meeting system. ACM International Multimedia Conference (pp. 1 - 12). Atlanta, USA: ACMNew York, NY, USA ©2 Mendeley Bibliography Aguilar ,L., Garcia-Luna-Aceves, J.J.,Moran,D., Craighill, E., & Brungardt, R. (1986). An architecture for a multimedia tele conferencing system. ACM

SIGCOMM Computer Communication Review, 16(3), 126-136. doi:10.1145/1013812.18188. Reushle, S. (2008). CONDUCTING A TRIAL OF WEB CONFERENCINGS OF TWARE :Why, How , and Perceptions from the Coalface. Online,(July),19-28. Scholl, J., Parnes, P., D. McCarthy, J., &Sasse, A.(2005). Designing a large-scale video chat application. ACM International Multimedia Conference (pp. 71 - 80). London, UK: ACM New York, NY, USA©2005. Watson, A., & Sasse, M. A. (1996). Evaluating Audio and Video Quality in Low-Cost.