



Lossless Image Compression using Remove Redundancy Technique: A Review

Rahul¹

M. Tech, ECE, HCTM College of Engineering, Kaithal, India ¹

Abstract: Image compression is process to remove the redundant information from the image so that only essential information can be stored to reduce the storage size, transmission bandwidth and transmission time. The essential information is extracted by various transforms techniques such that it can be reconstructed without losing quality and information of the image. The development of transmission and digital imaging has junction rectifier to high amount of knowledge needed to represent fashionable im-agery. this needs giant space for storage, and durable for transmission over Computer networks, and these are comparatively high-ticket. These factors prove the necessity for pictures compression. compression addresses the problem of reducing the quantity of house needed to represent a digital image yielding a compact illustration of a picture, and thereby reducing the image storage/transmission time necessities. The key plan here is to get rid of redundancy data bestowed among a picture to scale back its size while not moving the essential information of it.

Keywords: Image Processing, compression.

I. INTRODUCTION

Data compression is that the technique to cut back the redundancies in information illustration so as to decrease information storage needs and thus communication prices. Reducing the storage demand is comparable to increasing the capability of the data-storage medium and thus communication information measure. so the event of economical compression techniques can still be a style challenge for future communication systems and advanced multimedia system applications. Information is depicted as a mixture of data and redundancy. info is that the portion of knowledge that has to be preserved for good in its original kind so as to properly interpret the that means or purpose of the info. Redundancy is that portion of knowledge that may be removed once it's not required or may be reinserted to interpret the info once required. Most often, the redundancy is reinserted so as to get the initial information in its original kind. a method to cut back the redundancy of knowledge is outlined as information compression. The redundancy in information illustration is reduced such how that it may be afterwards reinserted to recover the initial information, that is named decompression of the info.

The increasing demand for multimedia content such as digital images and video has led to great interest in research into compression techniques. The development of higher quality and less expensive image acquisition devices has produced steady increases in both image size and resolution, and a greater consequent for the design of efficient compression systems. Although storage capacity and transfer bandwidth has grown accordingly in recent years, many applications still require compression.

The main objective is to design a compression system suitable for processing, storage and transmission, as well as providing acceptable computational complexity suitable for practical implementation. The basic rule of compression is to reduce the numbers of bits needed to represent an image. In a computer an image is represented as an array of numbers, integers to be more specific, that is called a —digital image. The image array is usually two dimensional (2D), If it is black and white (BW) and three dimensional (3D) if it is colour image. Digital image compression algorithms exploit the redundancy in an image so that it can be represented using a smaller number of bits while still maintaining acceptable visual quality.

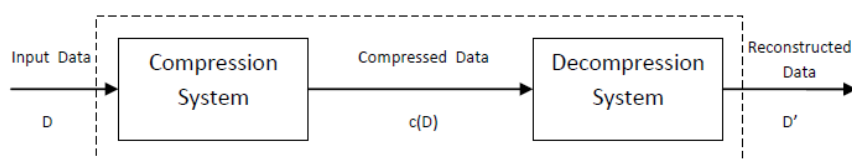


Figure 1: CODEC

Advantages of Data Compression

i) It reduces the data storage requirements



- ii) The audience can experience rich-quality signals for audio-visual data representation
- iii) Data security can also be greatly enhanced by encrypting the decoding parameters and transmitting them separately from the compressed database files to restrict access of proprietary information
- iv) The rate of input-output operations in a computing device can be greatly increased due to shorter representation of data
- v) Data Compression obviously reduces the cost of backup and recovery of data in computer systems by storing the backup of large database files in compressed form.

Disadvantages of Data Compression

- i) The extra overhead incurred by encoding and decoding process is one of the most serious drawbacks of data compression, which discourages its use in some areas.
- ii) Data compression generally reduces the reliability of the records.
- iii) Transmission of very sensitive compressed data through a noisy communication channel is risky because the burst errors introduced by the noisy channel can destroy the transmitted data.
- iv) Disruption of data properties of a compressed data, will result in compressed data different from the original data.
- v) In many hardware and systems implementations, the extra complexity added by data compression can increase the system's cost and reduce the system's efficiency, especially in the areas of applications that require very low-power VLSI implementation.

Redundancy different amount of data might be used. If the same information can be represented using different amounts of data, and the representations that require more data than actual information, is referred as data redundancy. In other words, Number of bits required to represent the information in an image can be minimized by removing the redundancy present in it. Data redundancy is of central issue in digital image compression. If n_1 and n_2 denote the number of information carrying units in original and compressed image respectively, then the compression ratio CR can be defined as

$$CR = n_1/n_2;$$

The main advantage of compression is that it reduces the data storage requirements. It also offers an attractive approach to reduce the communication cost in transmitting high volumes of data over long-haul links via higher effective utilization of the available bandwidth in the data links. This significantly aids in reducing the cost of communication due to the data rate reduction. Due to the data rate reduction, data compression also increases the quality of multimedia presentation through limited-bandwidth communication channels, Because of the reduced data rate. Offered by the compression techniques, computer network and Internet usage is becoming more and more image and graphic friendly, rather than being just data and text-centric phenomena.

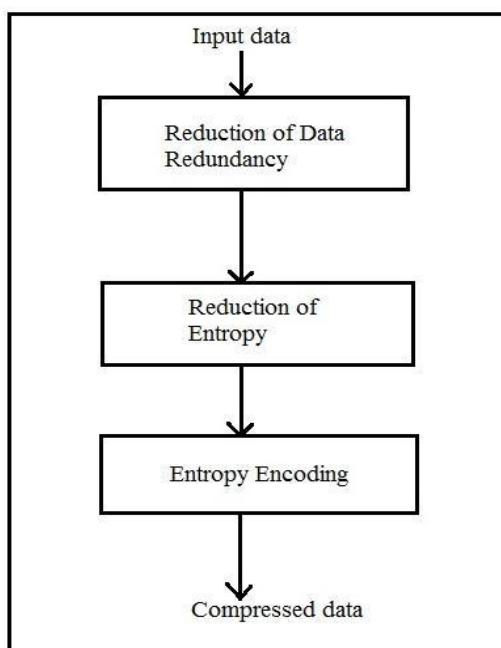


Figure 2: A data compression model.



In short, high-performance compression has created new opportunities of creative applications such as digital library, digital archiving, video teleconferencing, telemedicine and digital entertainment to name a few. There are many other secondary advantages in data compression. For Example it has great implications in database access. Data compression may enhance the database performance because more compressed records can be packed in a given buffer space in a traditional computer implementation. This potentially increases the probability that a record being searched will be found in the main memory. Data security can also be greatly enhanced by encrypting the decoding parameters and transmitting them separately from the compressed database files to restrict access of proprietary information. An extra level of security can be achieved by making the compression and decompression processes totally transparent to unauthorized users. The rate of input-output operations in a computing device can be greatly increased due to shorter representation of data. Data compression obviously reduces the cost of backup and recovery of data in computer systems by storing the backup of large database files in compressed form. The advantages of data compression will enable more multimedia applications with reduced cost.

II. LITERATURE REVIEW

Author did analysis of various Image compression techniques for different images is done based on parameters, compression ratio(CR), mean square error (MSE), peak signal to noise ratio (PSNR). Our simulation results from chapter 4 shows that we can achieve higher compression ratio using Hybrid technique but loss of information is more. DWT gives better compression ratio without losing more information of image. Pitfall of DWT is, it requires more processing power. DCT overcomes this disadvantage since it needs less processing power, but it gives less compression ratio. DCT based standard JPEG uses blocks of image, but there are still correlation exits across blocks. Block boundaries are noticeable in some cases. Blocking artifacts can be seen at low bit rates. In wavelet, there is no need to divide the image. More robust under transmission errors. It facilitates progressive transmission of the image (scalability). Hybrid transform gives higher compression ratio but for getting that clarity of the image is partially trade off. It is more suitable for regular applications as it is having a good compression ratio along with preserving most of the information.

On the other hand Fractal Image Compression gives a great improvement on the encoding and decoding time. A weakness of the proposed design is the use of fixed size blocks for the range and domain images. There are regions in images that are more difficult to code than others. Therefore; there should be a mechanism to adapt the block size (R, D) depending on the mean and variance calculated when coding the block. This type of compression can be applied in Medical Imaging, where doctors need to focus on image details, and in Surveillance Systems, when trying to get a clear picture of the intruder or the cause of the alarm. This is a clear advantage over the Discrete Cosine Transform Algorithms such as that used in JPEG [1].

In this thesis, an efficient lossless image compression algorithm for both the bi-nary images and gray-scale images is developed. Lossless image compression has extensive application in medical imaging, space photographing and film industry to archive and transmit images. To efficiently compress images, we first decompose images into a set of binary images to reduce encoding symbols. The benefits lie in four aspects. First, the progressive image transmission is achieved by image decomposition. Second, the encoding alphabet is reduced to the binary alphabet which is suitable for context quantization and adaptive arithmetic coding. Third, decomposition provides an opportunity to use those partial future" information of non-causal pixels to help encoding. Finally, the decomposition provides a straight-forward way to encode bi-level images, considering that current gray-scale image compression algorithms usually have bad performance on bi-level images. To deal with the well-know context dilution problem, we propose a Lloyd-like context quantization algorithm which refines the context mapping to minimize the compression rate. By combining image decomposition and context quantization, we design an efficient lossless image compression scheme for both bi-level images and gray-scale images. Experimental results show that our scheme has competitive compression performance on both bi-level images and gray-scale images compared to JBIG and CALIC, respectively. Our scheme provides an interesting progressive transmission feature for gray-scale image compression as well [2].

With the development of information technology, the rapid development of microelectronics technology, image information acquisition and use is also increasing, sensor technology also unceasingly to reform. A single sensor information obtained is limited, often can not meet the actual needs, in addition, different sensors have the advantage of the imaging principle and its unique, as in color, shape characteristics, band access, spatial resolution from the aspects of all have their own characteristics. Registration algorithm is proposed in this paper has better robustness to image noise, and can achieve sub-pixel accuracy; the registration time has also been greatly improved. In terms of image fusion, the images to be fused through wavelet transform of different resolution sub image, using a new image fusion method based on energy and correlation coefficient. The high frequency image decomposed using new energy pixels of the window to window energy contribution rate of fusion rules, the low frequency part by using the correlation coefficient of the fusion strategy, finally has carried on the registration of simulation experiments in the Matlab



environment, through the simulation experiments of fusion method in this paper can get the image fusion speed and high quality fast fusion image.

This paper based on the introduction of the principle of wavelet analysis and its application in image compression coding on the proposed an improved SPIHT algorithm. The fundamental of standard SPIHT algorithm is the quantization of the wavelet coefficients, the standard SPIHT algorithm adopted quantitative two into interval fixed, without considering the features of energy distribution of the wavelet coefficients, sometimes this is not necessarily the best method. This paper puts forward a new method based on this. The SPIHT algorithm the algorithm than the standard encoding and decoding times greatly reduced time consumption and PSNR and the standard SPIHT algorithm is quite. Finally, using MATLAB to achieve reasonable procedures show that the improved algorithm. In this paper, we propose a new adaptive multiplicative noise removal algorithm based on variation method. By analysis the shortcoming of Euler-Lagrange equation, we find that these traditional variation models are not fitted for multiplicative noise very well. The amount of multiplicative noise is relative with the pixel value. [3].

Common image compression standards are usually based on frequency transform such as Discrete Cosine Transform or Wavelets. We present a different approach for lossless image compression, it is based on combinatorial transform. The main transform is Burrows Wheeler Transform (BWT) which tends to reorder symbols according to their following context. It becomes a promising compression approach based on context modelling. BWT was initially applied for text compression software such as BZIP2; nevertheless it has been recently applied to the image compression field. Compression scheme based on Burrows Wheeler Transform is usually lossless; therefore we implement this algorithm in medical imaging in order to reconstruct every bit. Many variants of the three stages which form the original BWT-based compression scheme can be found in the literature. We propose an analysis of the more recent methods and the impact of their association. Then, we present several compression schemes based on this transform which significantly improve the current standards such as JPEG2000 and JPEG-LS. In the final part, we present some open problems which are also further research directions. [4].

Author, "Efficient data hiding scheme using lossless data compression and image steganography", International Journal of Engineering Science and Technology (IJEST) Steganography is an art of hidden communication in which secret message is embedded into a cover image. It has many applications like Online transactions, military communication etc. In this paper, we have proposed a data hiding scheme using image steganography and compression. This scheme can be applied to gray scale as well as color images. This scheme improves the data hiding capacity of the image as compared to other existing image steganography methods while retaining the quality of the image after embedding the secret message into it. The improved embedding capacity of the image is possible due to preprocessing the secret message in which a lossless data compression technique is applied [5].

III. OBJECTIVES

Our objective is to design an efficient and effective progressive lossless image compression scheme.

- Study of existing image compression techniques.
- Understand and design efficient "Remove the Redundant Data" Technique.
- Implement the proposed algorithm in MATLAB Tool for Redundant data removal and image compression.
- To Achieve a higher PSNR value, decomposes an image wavelet to level $N=2$
- Evaluate results.

Problem Statement

Uncompressed images normally require a large amount of storage capacity and transmission bandwidth. For example, a 24-bit true color high-definition television (HDTV) image with size 1920×1080 needs approximately 6 megabytes (6M bytes) of storage space. On the other hand, various types of redundancy exist in images, such as temporal redundancy, spatial redundancy (or interpixel redundancy), coding redundancy, spectral redundancy and psychovisual redundancy. The primary goal of image compression is to minimize the number of bits required to represent the original images by reducing the redundancy in images, while still meeting the user-defined quality requirements. The core issue in image compression is to design efficient and effective compression schemes. In terms of reconstruction ability, image compression schemes can be broadly classified into two major categories: lossless image compression and lossy image compression. Lossless image compression refers to the compression in which the original image can be fully reconstructed from the compressed image, i. e., no loss of any information during the compressing. Lossy image compression, on the contrary, allows some kind of difference or distortion between the reconstructed image and the original image, and the original image can not be fully recovered.

Lossless image compression has many applications such as medical imaging, space photograph, and film industry. In practice, medical images must be represented flawlessly for medical professionals to make clinical diagnosis with accuracy. Any minor distortion or errors introduced by lossy compression may lead to serious consequences to patients. In space exploration, astronomical images obtained by the satellites are often compressed and transmitted back to the



earth for later processing such as object identification and feature extraction. These processing procedures may “amplify” the distortion caused by lossy compression and thus produce false results due to the distortion. In such cases, lossy compression is not appropriate because original astronomical images are very difficult and expensive to be obtained again. Finally, in film industry, lossless compression also has a huge market in archiving the films in order to save storage and meanwhile maintain the original high quality for future editing and re-compressing.

IV. PROPOSED ALGORITHM

Image compression is process to remove the redundant information from the image so that only essential information can be stored to reduce the storage size, transmission bandwidth and transmission time. The essential information is extracted by various transforms techniques such that it can be reconstructed without losing quality and information of the image.

V. CONCLUSION AND FUTURE WORK

This Paper has been proposed the Image Compression algorithm that can be used to compress images. The algorithm will take less time to compress image and compression ratio will be improved.

In future we will implement the proposed algorithm in the MATLAB Simulation Tool. The accuracy will be calculated using the performance parameters such as PSNR and compression Rate.

REFERENCES

- [1] Archana Deshlahra, “Analysis of Image Compression Methods Based On Transform and Fractal Coding”,2013
- [2] Hui Zha, “Progressive Lossless Image Compression Using Image Decomposition and Context Quantization, 2007
- [3] Zhang Ning, “ STUDY ON IMAGE COMPRESSION AND FUSION BASED ON THE WAVELET TRANSFORM TECHNOLOGY”, 2015
- [4] Xiao Zhou Image Compression Based on Discrete Cosine Transform and Multistage Vector Quantization”, 2015
- [5] Terese Nilsson, “Custom Lossless Compression And High-Quality Lossy Compression Of White Blood Cell Microscopy Images For Display And Machine Learning Applications”.
- [6] Vincent VAJNOVSZKI, “Lossless and Nearly-Lossless Image Compression Based on Combinatorial Transforms”, 2011
- [7] Dongni Fan, “Guaranteed Quality Ecg Signal Compression Algorithm”, 2014